

Endurance 30 FD 4.5-27x56 SF

SKU: 16440 • Riflescope

Basics

Mounting the Riflescope

Warning: Be sure that the firearm is not loaded. Always practise safe firearms handling. Always check that the diameter of the riflescope body tube matches the diameter of the riflescope rings that you wish to use. Always make sure that the base of the rings will fit your rifle. High recoil rifles may require rings fitted with a recoil stop pin.

- 1 Fix the rings to the rifle base – do not completely tighten.
- 2 Remove the ring tops and lay the riflescope into the rings. The riflescope should be mounted as low as possible without touching the barrel, rear sight, or the receiver.
- 3 Before tightening the rings, look through the riflescope in your normal shooting position. Adjust the riflescope (forward or backward) until you find the furthest point forward (to ensure maximum eye relief) that allows you to see a full field of view.
- 4 Rotate the riflescope in the rings until the reticle pattern is upright and the elevation turret is on top.
- 5 Tighten the base screws evenly, securing the mounts to the rifle base and tighten the ring top screws evenly on each side.

Warning: Avoid over tightening the rings. This can damage the riflescope affecting performance or rendering it inoperable.

16 in/lbs (1.33 ft/lbs, or 1.8 Nm) for ring top screws and 30 in/lbs (2.5 ft/ lbs, or 3.4 Nm) for ring base screws.

Warning: When installing a riflescope to a rifle with high levels of recoil, always ensure that there is adequate eye relief. This will avoid eye injury.

Turret Type

Zero Stop Exposed Locking Turrets

The Zero-Stop elevation turret has a built-in return to zero feature. This physical stop can be set after zeroing the riflescope so you can return to the same zero position without the need to count clicks and rotations. The turret can be rotated counter-clockwise and physically stops at '0' when turning back clockwise. This allows you to dial out to further distances, but always return to zero. Note, the windage turret does not have a zero-stop feature.

Adjusting the Zero-Stop turret:

1

Before adjusting the turrets, you must first unlock them; this is achieved by pulling them outwards. They will now click when rotated.

2

The turrets can then be adjusted until the point of aim matches the point of impact. To lock the turrets, simply push them back down.

3

When a satisfactory zero is achieved, the turrets can be reset. To do this, loosen the three screws on the side of the turret with the turret in the down and locked position. The turret cover can then be removed and rotated to the "0" position. Reinstall the turret and tighten the three screws. The riflescope is now "zeroed".

Setting the Zero-Stop:

1

To disengage the Zero-Stop feature, loosen the three screws on the outer edge of the turret and pull the turret away from the riflescope. The outer turret cap will be removed revealing the inner Zero-Stop workings of the turret.

2

Slightly loosen the three screws on the 'Rotate To Set Zero-Stop' ring. The Zero-Stop ring will now freely rotate.

Sight-in your riflescope either using the inner rotation dial marked 'UP'. or after

- 3 reinstalling the outer turret cap. The turrets can be adjusted until the point of aim matches the point of impact.
- 4 To finalise the setup of the Zero-Stop feature, with the outer turret cap removed, rotate the Zero-Stop ring clockwise until it physically stops. Tighten the three screws on the Zero-Stop ring.
- 5 Reinstall the outer turret cap. Take care to align the '0' marker on the turret with the click marker.

Removing the Zero-Stop feature:

If the Zero-Stop feature is not required, it can be removed so the turret operates as a normal push/pull locking turret. It is recommended to remove the Zero-Stop feature if it is not going to be used.

- 1 Loosen the three screws on the outer edge of the turret and pull the turret away from the riflescope, removing the outer turret cap.
- 2 While holding the inner rotation dial marked 'UP', use a 5mm Allen wrench to remove the Allen bolt and 'UP' dial on the top of the turret.
- 3 Slightly loosen the three screws on the 'Rotate To Set Zero-Stop' ring.
- 4 Remove the Zero-Stop ring and the second circular ring below the Zero-Stop ring. Keep safe for later use.
- 5 Reinstall the 'UP' dial and Allen bolt.
- 6 Finally, reinstall the outer turret cap. Take care to align the '0' marker on the turret with the click marker.

1/4 MOA

Each click of adjustment is measured in MOA (Minutes Of Angle) on the target.

1 click = 1/4 MOA = 1/4 in at 100yds, or 7mm at 100m.

Therefore at different ranges, each 1/4 MOA click of adjustment changes: 50yds = 1/8 in, 100yds = 1/4 in, 200yds = 1/2 in, 300yds = 3/4 in. 50m = 4mm, 100m = 7mm, 200m = 15mm, 300m = 22mm.

Parallax

Side Focus

To give the best accuracy all riflescopes should be parallax error-free at the required target distance. Most non-parallax adjustable riflescopes are set at 100 yards (91 meters) to be parallax error-free. Any other distance can cause a parallax error; this will show itself as a movement of the reticle relative to the target when you move your eye position. Riflescopes with parallax adjustment allow the shooter to correct this error for any target distance.

After the zero-in process, we recommend that the parallax adjustment is checked. The riflescope has printed preset distance markings on the parallax adjuster, these are only a guide to get you started. Check the parallax markings by setting the riflescope on maximum magnification, then proceed to check the printed markings against known target distances. If required be prepared to re-mark the adjuster to your own personal settings.

Ocular Lens

Ocular Lens Adjustment

All Hawke riflescopes are fitted with an adjustable ocular focus, also known as diopter setting. To focus your eye characteristics to the riflescope, giving a crystal clear picture of the reticle, carry out the following adjustment:

1

With the riflescope set to roughly half magnification, hold the riflescope about three or four inches from your eye and look through the eyepiece at a blank, flatly lit, bright area such as a wall or open sky.

If the reticle is not sharply defined instantly, turn the eyepiece (either direction) a

2 few turns. Quickly glance through the riflescope again. If the focus has improved, but is still not perfect, continue focusing.

3 If the focus becomes worse, turn it the opposite direction until correct.

Warning: Never look at the sun with a riflescope, it may permanently damage your eyes.

Zeroing

Rimfire & Centerfire (Live Ammo)

Warning: All shooting should be carried out at an approved range or other safe area. Eye and ear protection is recommended. Final sighting-in of your rifle should be carried out with live ammunition, based on your preferred target distance.

Warning: If a bore sighting collimator or any other bore obstructing device was used, it must be removed before zeroing with live ammunition. An obstruction can cause serious damage to the rifle and possible injury to yourself and others nearby. Sighting in should be at the distance that you are normally going to shoot. On side focus models, the parallax should be set to this distance during the sighting in process.

1 Choose an appropriate magnification power for the target distance.

2 From a steady rest position fire three rounds at a target. Observe point of impact on the target and adjust windage and elevation turrets as needed to correct aim. For left/right adjustment, turn the windage turret clockwise to move the point of impact left and counter-clockwise to move the point of impact right. For up/down adjustment, turn the elevation turret clockwise to lower the point of impact down and counter-clockwise to raise the point of impact up. E.g. if the round has landed below where aimed, then the point of impact needs to be raised. This is done by adjusting the elevation turret counter-clockwise in the direction of "Up".

3 Repeat until point of aim and point of impact are the same.

Rimfire & Centerfire (Zero-Stop)

Pre Zeroing:

The Zero-Stop elevation turret has a built-in return to zero feature. This physical stop can be set after zeroing the riflescope so you can return to the same zero position without the need to count clicks and rotations. The turret can be rotated counter-clockwise and physically stops at '0' when turning back clockwise. This allows you to dial out to further distances, but always return to zero. Note, the windage turret does not have a zero-stop feature.

Adjusting the Zero-Stop turret:

1

With the firearm in a steady rest position, open the action of the firearm and look along the bore to a predetermined target (at approximately 50 yards/meters).

2

Adjust the parallax setting to the 50 yard position (parallax adjustable models only). Set the magnification setting to an appropriate level for the distance.

3

Adjust the windage and elevation adjusters to position the reticle on the center of the target.

4

For windage adjustment, turn the windage adjustment turret clockwise to move the rifle's point of impact left and counter clockwise to move the rifle's point of impact right. In the same manner, adjust the elevation by turning the elevation adjustment clockwise to lower the rifle's point of impact and counter clockwise to raise the rifle's point of impact.

Note: If using adjustable ring mounts, make any necessary major adjustment with them, allowing for minor adjustment using the riflescope turrets. In certain shooting situations, such as long range bench rest shooting, when elevation adjustable rings are not available, the rings may have to be shimmed. We recommend using Hawke Mount Inserts, these will prevent damage to the riflescope tube. Only final precision adjustment should be made with the riflescope's adjustment turrets.

Air Rifle

Zeroing can be done either manually or with a bore sighting collimator. If a bore sighting collimator is not available, it is recommended to zero manually.

1

For air rifles start by taking aim at a nearby target (at approximately 20 yards/meters).

2

On side focus models, the parallax should be set to this distance during the sighting in process.

3

Choose an appropriate magnification power for the target distance.

4

From a steady rest position fire three rounds at a target. Observe the point of impact on the target and adjust windage and elevation turrets as needed to correct aim and position the reticle on the center of the target. For left/right adjustment, turn the windage turret clockwise to move the point of impact left and counter-clockwise to move the point of impact right. For up/down adjustment, turn the elevation turret clockwise to lower the point of impact down and counter-clockwise to raise the point of impact up. E.g. if the round has landed below where aimed, then the point of impact needs to be raised. This is done by adjusting the elevation turret counter-clockwise in the direction of "Up".

5

Repeat until point of aim and point of impact are the same.

Note: if the point of impact is significantly off target after firing your initial rounds, inspect the mounting of the riflescope to ensure it is not poorly aligned or positioned. If required try removing the riflescope from the mounts and mounts from the rifle and starting again. This may remove any error in initial mounting.

Focal Plane

Second Focal Plane (SFP)

Second focal plane optical systems have their reticles positioned toward the eyepiece of the scope. The reticle pattern, as you see it, does not change size with alteration to the scope's magnification. This is useful, as it means the reticle pattern is not large and does not obstruct your view when on higher magnifications.

Each reticle is designed with its aim points calibrated on a specific magnification.

Accessories

Sunshade

The sunshade can be attached to the riflescope by screwing it into the objective thread. Multiple sunshades can be combined to create a larger sunshade.

Zoom Lever

All models are supplied with a removable zoom lever for fast and precise adjustment of your riflescope magnification with minimum effort. To install the zoom lever you must first remove the blanking screw in the zoom ring using the supplied 2mm Allen wrench.

Flip-up Covers


Metal flip-up covers are supplied to protect the lenses when not in use. Each cover has a key for attaching it to the scope. Open the flip-up cover and place it at the desired angle.

Locate the correct size key and insert into the grooves. The grooves are located on the inner thread of the covers. Turn the key until the cover is securely in place. If the cover is not in the correct position, loosen slightly and adjust position. The opening and closing resistance of the flip-up cover can be adjusted by loosening or tightening the screw in the hinge.

Note: Ensure the ocular focus has been adjusted before installing the flip-up cover to the eyepiece. The cover may not end up in the desired position if the ocular is adjusted after the flip-up cover is installed.

Note: The flip-up cover can also be installed on the sunshade.

Reticle: LR2 FD (20x)

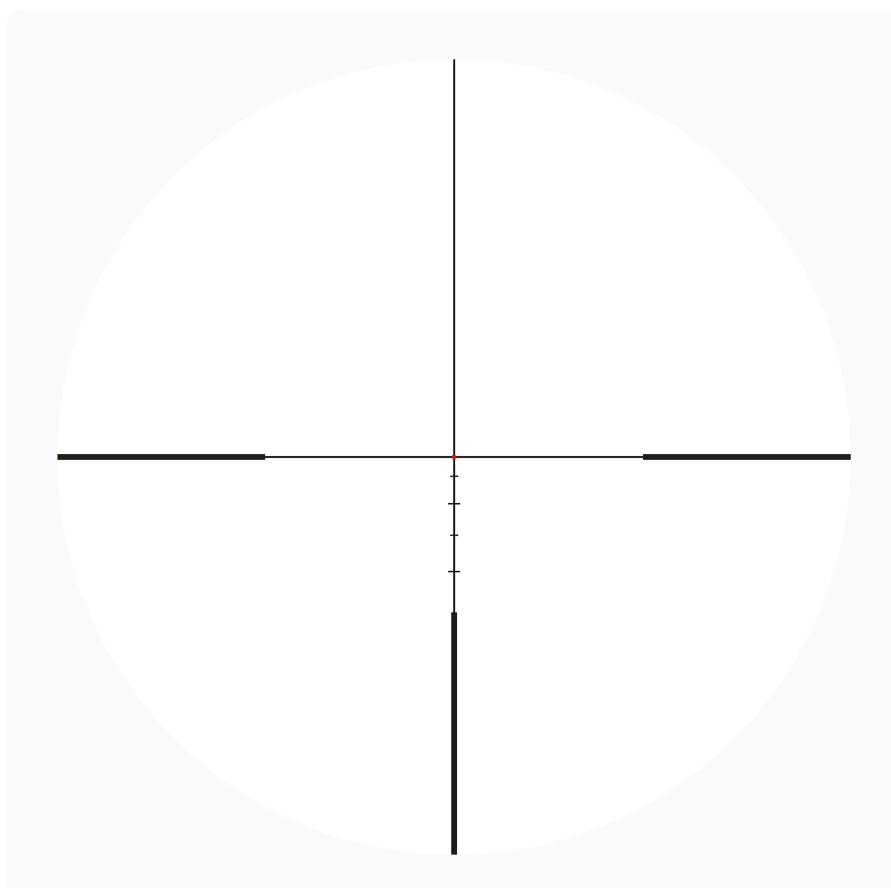

A variant of the classic L4 reticle, the LR2 FD uses a more open outer post design to keep more of the target visible while aiming and offers extra aim points for holdover. The bright fiber optic center dot gives a sharp aim point for quick reference and target acquisition. The thick outer posts make visibility easy when hunting in low-light conditions. A fine upper post doesn't obstruct your view of the target. Extra holdover aim points are included on the fine lower post to give graduation and accuracy when shooting at longer distances. The LR2 FD reticle is the second generation of LR Dot style reticles from Hawke and has updated aim point subtensions and BDC to complement modern centerfire cartridges and muzzle speeds.

Warranty

No Fault Lifetime Warranty

Hawke products are covered by our lifetime warranty. For full details and conditions or to make a claim please see hawkeoptics.com/warranty or contact your in-country distributor. **Please note:** your proof of purchase should accompany any warranty claim.

Product Registration

You can register your purchase with us now at hawkeoptics.com/registration Hawke products are covered and/or licensed by one or more of the following registered designs, patents or are patent pending – visit hawkeoptics.com/ip